




# Southwest Washington Chapter of ICC

This construction detail is illustrative of the minimum standard of construction based upon the 2009 IRC / WAC 51-51

Visit our web site at: [www.sww-icc.org](http://www.sww-icc.org)

## One & Two Family

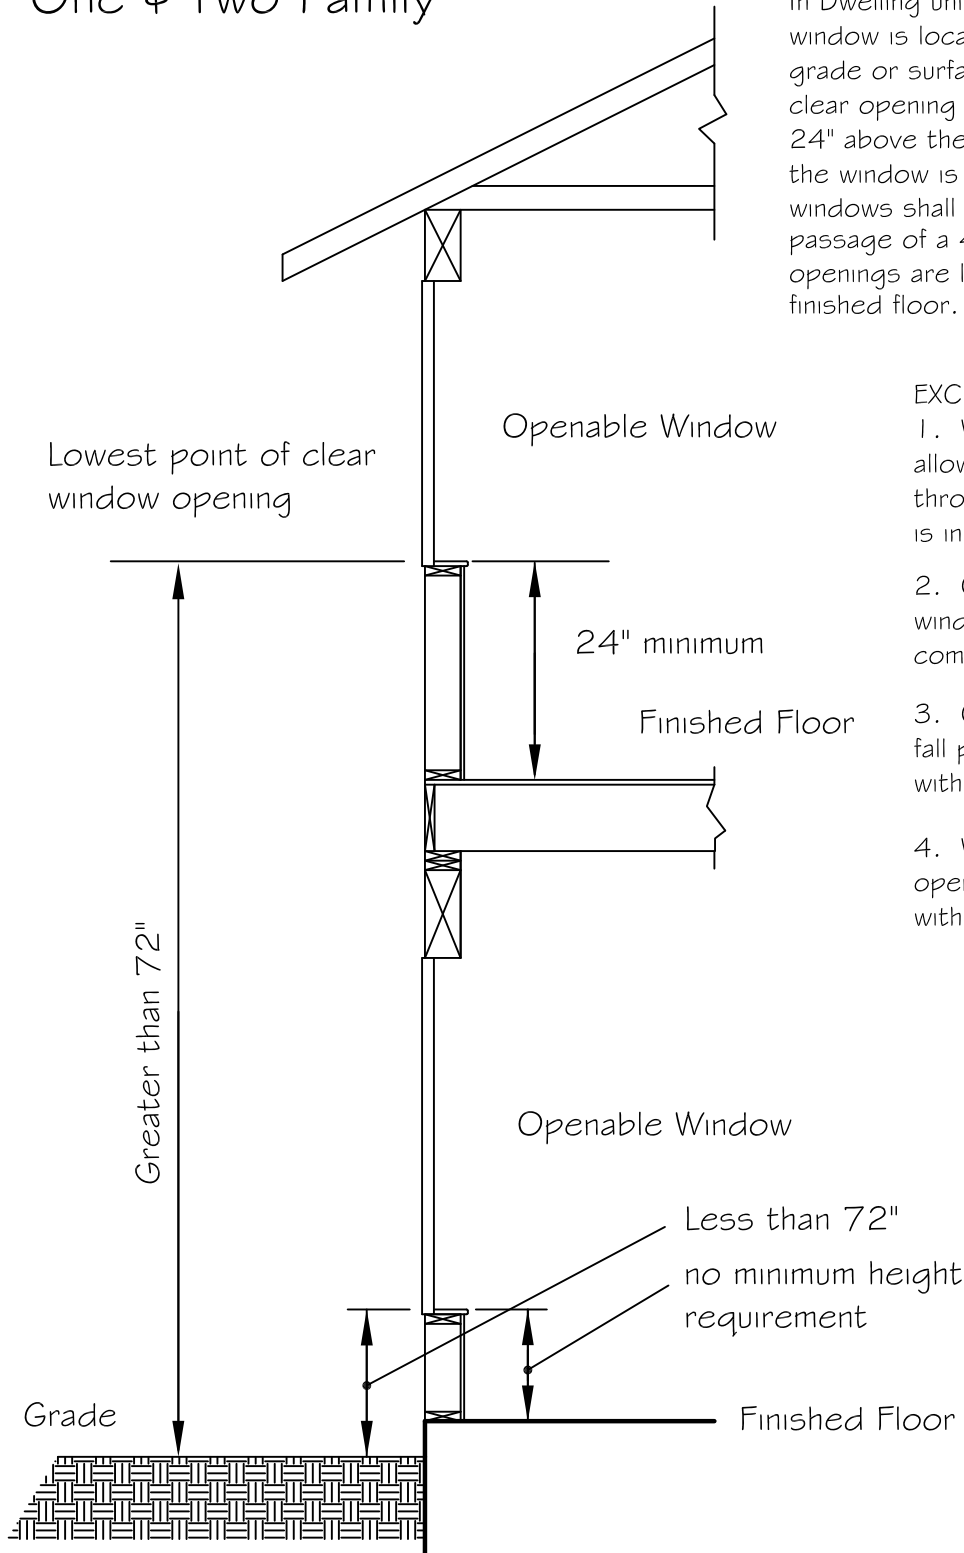

### R6 I 2.2 Window Sills.

In Dwelling units, where the opening of an operable window is located more than 72" above finished grade or surface below, the lowest part of the clear opening of the window shall be a minimum of 24" above the finished floor of the room in which the window is located. Operable sections of windows shall not permit openings that allow passage of a 4" diameter sphere where such openings are located within 24 inches of the finished floor. R6 I 2.2

#### EXCEPTION:

1. Windows whose openings will not allow a 4" diam. sphere to pass through the opening when the opening is in its largest opened position.
2. Openings that are provided with window fall prevention devices that comply with Section R6 I 2.3.
3. Openings that are provided with fall prevention devices that comply with ASTM F2090.
4. Windows that are provided with openings limiting devices that comply with Section R6 I 2.4.