Southwest Washington Chapter of ICC

This construction detail is illustrative of the minimum standard of construction based upon the 2003 IRC / WAC 51-51

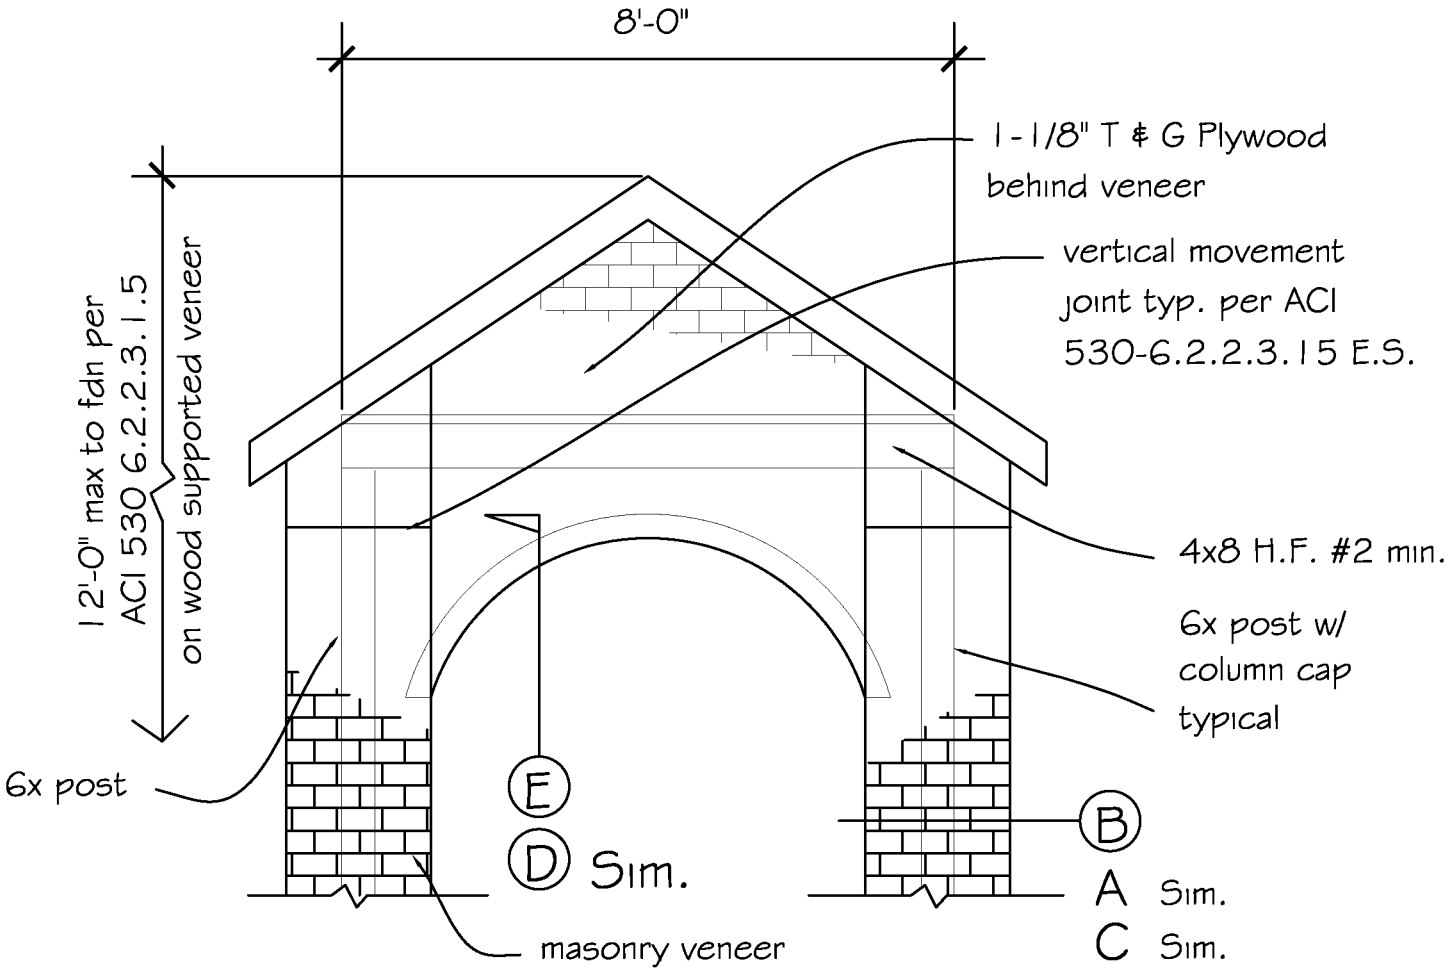

ELEVATION "A"

Wood supported veneer arch

Note:

1. Strand wire ties shall not be less than No. 9 US gage wire and shall have a hood embedded in the mortar joint, or if sheet metal, shall be not less than No. 22 U.S. gage wire by 7/8 inch corrugated. Each tie shall not be spaced more than 18" vertically and not more than 16" horizontally.

2. Veneer to be a maximum weight of 40#/sq.ft.. R703.7.2

3. Install 3/16" diam. weep holes above G.I. flashing @ max. 33" o.c.. R703.7.6

4. Additional ties required around all wall openings greater than 16" in either direction. Ties to be placed within 12" of wall opening. R703.7.4.1.1.

Masonry Veneer Arch	DWG BY MLM/JRG	Date 1-5-05	R703.7-1